





545 Basket Road • Webster, NY 14580
Toll Free • 800.691.0292 | Local • 585.265.1990 | Fax • 585.265.6678
sales@fastenersdirect.com
www.fastenersdirect.com


HANGER BOLTS - 18-8 STAINLESS STEEL, FULLY THREADED

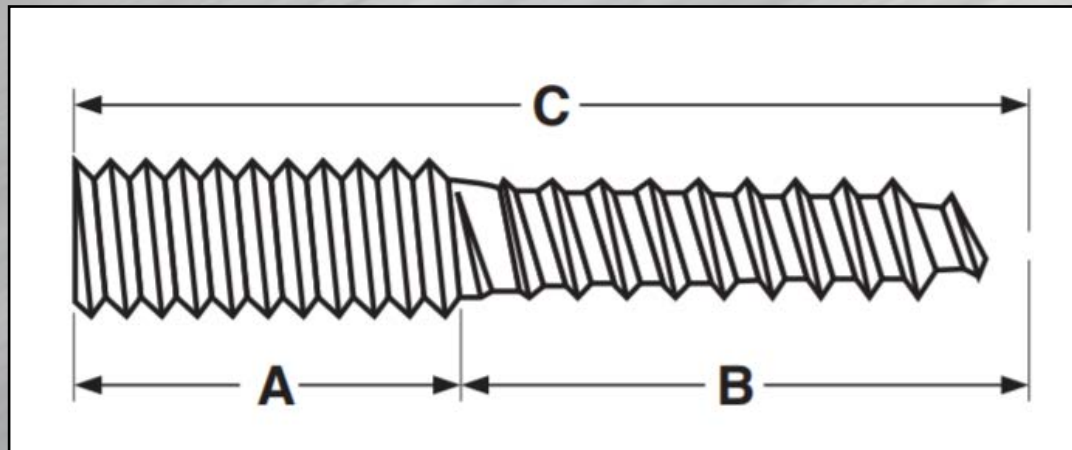

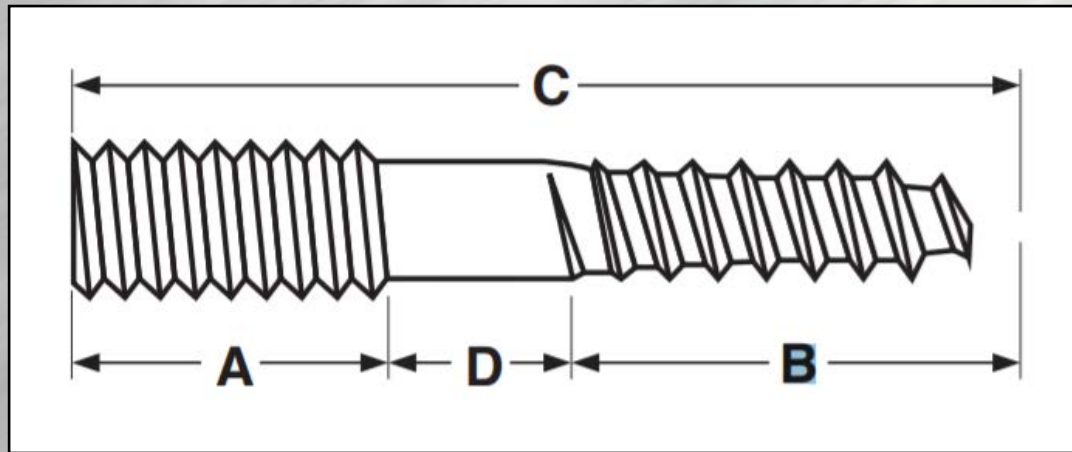

545 Basket Road • Webster, NY 14580
 Toll Free • 800.691.0292 | Local • 585.265.1990 | Fax • 585.265.6678
 sales@fastenersdirect.com
 www.fastenersdirect.com

HANGER BOLTS - 18-8 STAINLESS STEEL, FULLY THREADED

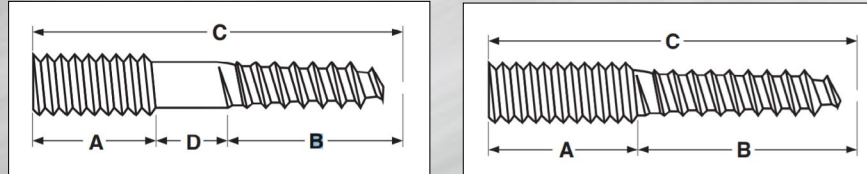

Tolerance on Length	Up to 6": +/- 1/16"	Over 6": +/- 1/8"
----------------------------	---------------------	-------------------

Description	Bolt with threaded areas at both ends — lag screw thread at one end and unified thread at the other. Standard hanger bolts are designed for insertion into a predrilled pilot hole. The end of the wood thread it designed as a taper which is threaded all the way to its blunt tip.
Applications / Advantages	Designed to hang material from wooden strutures. The lag is wrenched into the wood and the assembly is complete after applying a nut. Used for suspending electrical wiring and sheet metal. Also common in the furniture industry.
Material	Steel: AISI 1008 & 1010 Steel Stainless: Type 303 or 304 Stainless Steel
Core Hardness (Steel Only)	No. 10 through 1/2 in. diameter, all lengths: Rockwell B80 - B100
Tensile Strength (Steel Only)	No. 10 through 1/2 in. diameter, all lengths: 74,000 psi minimum (applies only to stresses applied to the Unified thread-side of the fastening)