




545 Basket Road  
Webster, NY 14580

Toll Free: 800.691.0292 | Local: 585.265.1990 | Fax: 585.265.6678

www.fastenersdirect.com  
sales@fastenersdirect.com

# SIX-LOBE, TRIM HEAD DRYWALL SCREWS

## Six-Lobe Drive Trim Head

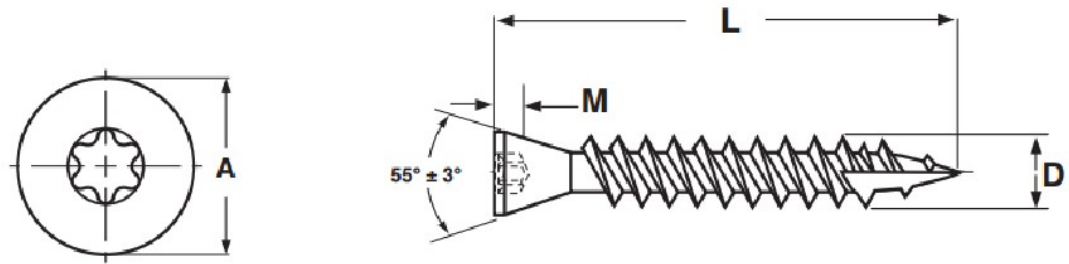

Nominal Size & Threads per Inch	A		M		D		Drive Size
	Head Diameter		Square Recess Depth		Thread Diameter		
	Max	Min	Max	Min	Max	Min	
7-10	0.236	0.223	0.067	0.058	0.168	0.161	T-15

Tolerance on Length	1-5/8" length	+0, -0.06
	2-1/4" length	+0, -0.07

**NOTE:** There is no single standard for trim head drywall screw dimensions. These values are offered as a guide; deviations from these specifications may occur.

**DESCRIPTION:** A screw with a coarse thread, extra sharp point with a chip cavity, a six-lobe recess and countersunk flat head of a width 1/3" less than a standard bugle drywall screws.

**APPLICATIONS/ADVANTAGES:** For attaching wood trim or railing to fences. Type 17 point minimizes the chances of splitting wood. Stainless material offers superior resistance to corrosion.

**MATERIAL:** Class 305 or equivalent Stainless Steel.

**FINISH:** Screws are typically commercially passivated.