




545 Basket Road • Webster, NY 14580  
Toll Free • 800.691.0292 | Local • 585.265.1990 | Fax • 585.265.6678  
[sales@fastenersdirect.com](mailto:sales@fastenersdirect.com)  
[www.fastenersdirect.com](http://www.fastenersdirect.com)

# SAE FLAT WASHERS - STANDARD 18-8 STAINLESS STEEL



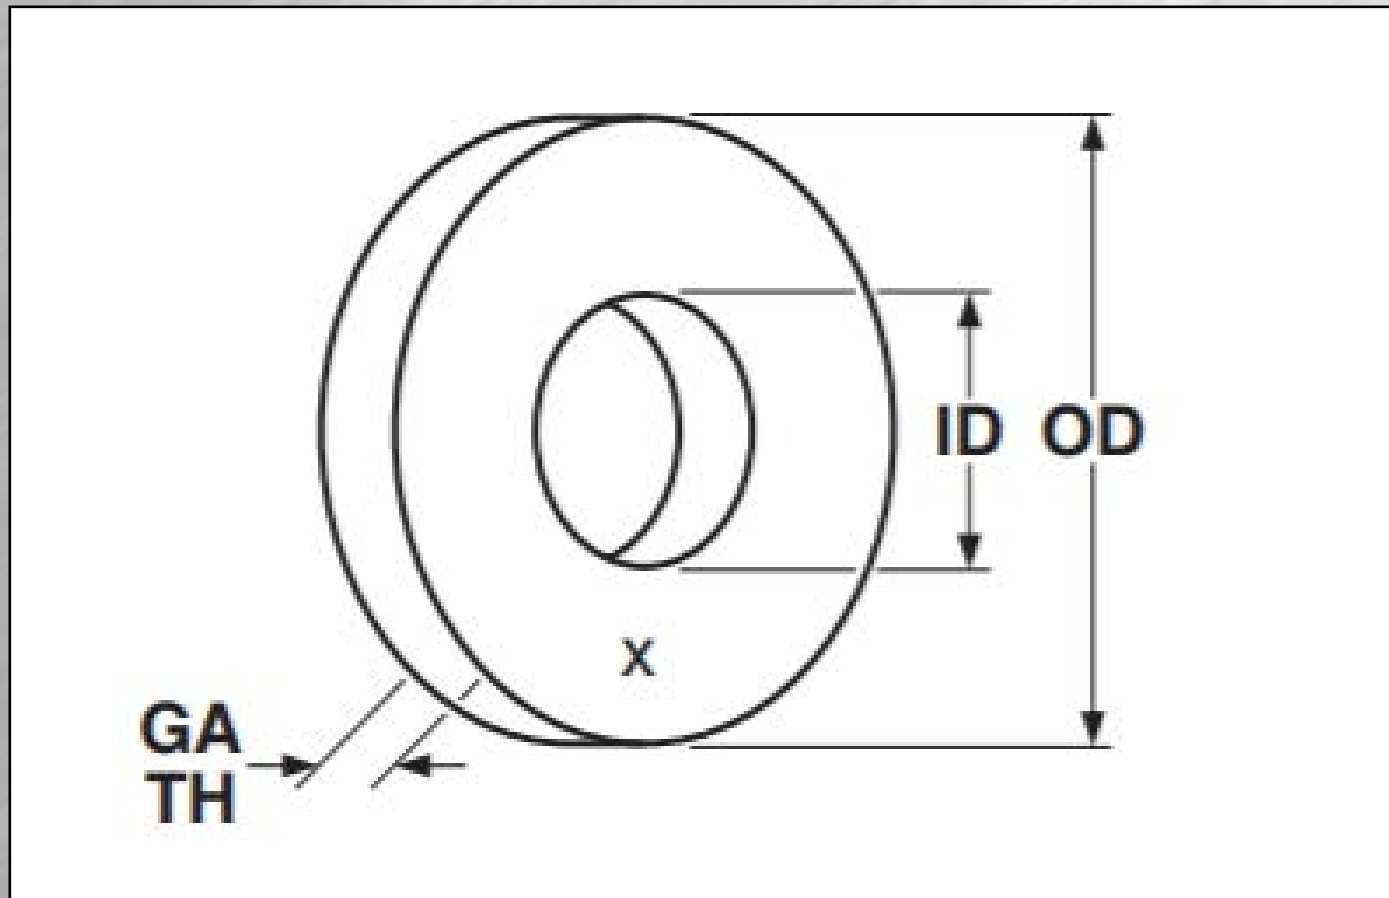

545 Basket Road • Webster, NY 14580  
Toll Free • 800.691.0292 | Local • 585.265.1990 | Fax • 585.265.6678  
[sales@fastenersdirect.com](mailto:sales@fastenersdirect.com)  
[www.fastenersdirect.com](http://www.fastenersdirect.com)

# SAE FLAT WASHERS - STANDARD 18-8 STAINLESS STEEL

Size	OD		ID		TH	
	Outside Diameter		Inside Diameter		Thickness	
	Max	Min	Max	Min	Max	Min
4	.317	.307	.130	.120	.034	.028
6	.375	.370	.161	.151	.034	.028
8	.375	.370	.177	.167	.034	.028
10	.438	.432	.208	.198	.034	.028
1/4	.625	.620	.286	.276	.054	.046
1/4	.750	.745	.327	.281	.080	.051
5/16	.630	.620	.348	.338	.080	.051
5/16	.755	.745	.348	.338	.054	.046



545 Basket Road • Webster, NY 14580  
 Toll Free • 800.691.0292 | Local • 585.265.1990 | Fax • 585.265.6678  
 sales@fastenersdirect.com  
 www.fastenersdirect.com

# SAE FLAT WASHERS - STANDARD 18-8 STAINLESS STEEL

Size	OD		ID		TH	
	Outside Diameter		Inside Diameter		Thickness	
	Max	Min	Max	Min	Max	Min
5/16	.880	.870	.348	.338	.080	.05=1
5/16	1.005	.995	.348	.338	.080	.051
3/8	.755	.745	.416	.396	.080	.051
3/8	.880	.870	.396	.386	.054	.046
3/8	1.005	.995	.396	.386	.066	.058
7/16	1.130	1.120	.505	.495	.066	.058
1/2	1.255	1.245	.567	.557	.066	.058
5/8	1.505	1.495	.693	.683	.084	.074



545 Basket Road • Webster, NY 14580  
 Toll Free • 800.691.0292 | Local • 585.265.1990 | Fax • 585.265.6678  
 sales@fastenersdirect.com  
 www.fastenersdirect.com

# SAE FLAT WASHERS - STANDARD 18-8 STAINLESS STEEL

Size	OD		ID		TH	
	Outside Diameter		Inside Diameter		Thickness	
	Max	Min	Max	Min	Max	Min
3/4	1.755	1.745	.817	.807	.097	.082
7/8	2.005	1.995	.943	.933	.117	.102
1	2.005	1.995	1.067	1.057	.133	.117

<b>Description</b>	A thin, flat, circular stamping with a centrally located hole, made from an 18-8 austenitic stainless steel.
<b>Applications / Advantages</b>	Designed for use with 18-8 stainless steel screws and nuts in general industrial applications where parts are subject to corrosion.
<b>Material</b>	18-8 stainless steel