




545 Basket Road • Webster, NY 14580
 Toll Free • 800.691.0292 | Local • 585.265.1990 | Fax • 585.265.6678
 sales@fastenersdirect.com
 www.fastenersdirect.com

FLAT & PAN HEAD SPLIT DRIVE ANCHORS

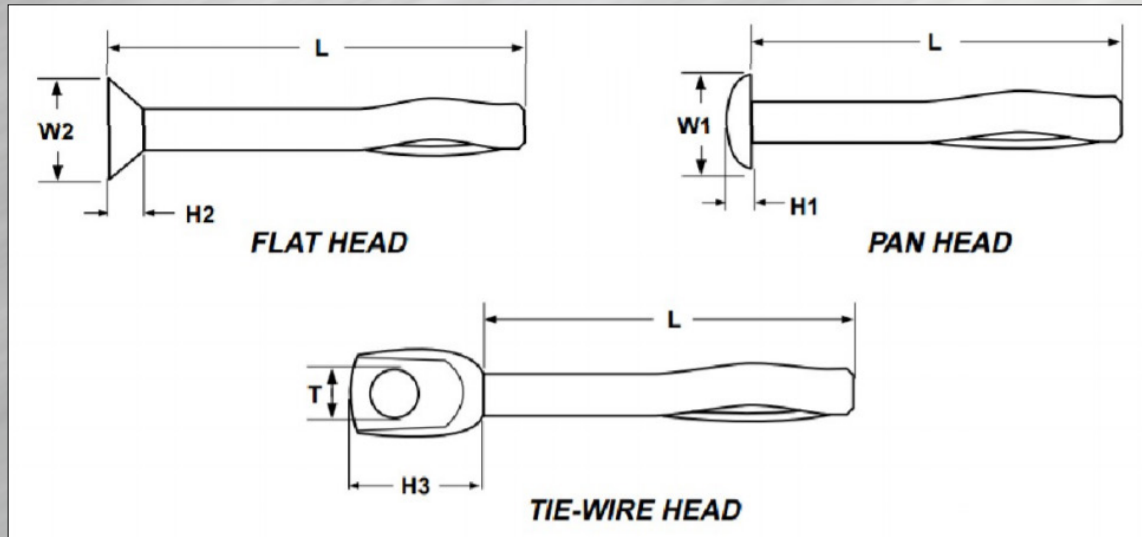

Anchor Size	Fixture Clearance Hole	H1	W1	H2	W2	H3	T	PERFORMANCE DATA		
		Round Head		Flat Head		Tie-Wire		Embedment Depth	In 4,000 PSI Concrete	
		Height	Width	Height	Width	Head Height	Tie-Wire Hole		Min.	Tensile (lbs.)
Ref.	Ref.	Ref.	Ref.	Ref.	Ref.	Ref.	Ref.			
3/16	1/4	3/8	3/32	7/64	3/8	-	-	7/8	1350	1520
1/4	5/16	1/8	1/2	9/64	1/2	5/8	13/64	1-1/8	2200	2320
3/8	7/16	3/16	3/4	-	-	-	-	1-7/8	5300	7810
1/2	9/16	1/4	1	-	-	-	-	2-5/8	6200	11,340



545 Basket Road • Webster, NY 14580
Toll Free • 800.691.0292 | Local • 585.265.1990 | Fax • 585.265.6678
sales@fastenersdirect.com
www.fastenersdirect.com

FLAT & PAN HEAD SPLIT DRIVE ANCHORS

DESCRIPTION: A one-piece steel anchor with two sheared or “split” halves at the base which are pre-expanded to a specific size. Split drive anchors are available in flat head, pan and tie-wire head styles.

APPLICATION / ADVANTAGES: A light-duty anchor for use with dead loads in concrete or stone. The opening in the base of the anchor is of a size which, when under pressure, the anchor will try to regain, which creates the pressure on the inner walls of the hole, holding the fastening in place. The friction caused by this expansion can compensate for poor grades of concrete.

MATERIAL: Heat treated AISI 1038 or an equivalent alloy steel.

ANCHOR SPACING: Should be at least ten anchor diameters between anchors and a minimum of five anchor diameters from the edge of the work surface.

TENSILE & SHEAR STRENGTH: Split drive anchors shall not be removable or show evidence of failure when subjected to axially applied proof test loads as specified in the above table when set in concrete of 4000 psi compressive strength. The suggested safe working load is one-fourth the loads shown in the above table.

PLATING: Split drive anchors are most frequently supplied with a zinc plating.