



FASTENERS DIRECT


TM

545 Basket Road
Webster, NY 14580

Toll Free: 800.691.0292 | Local: 585.265.1990 | Fax: 585.265.6678

www.fastenersdirect.com
sales@fastenersdirect.com

DRIVE PIN ANCHOR BOLTS

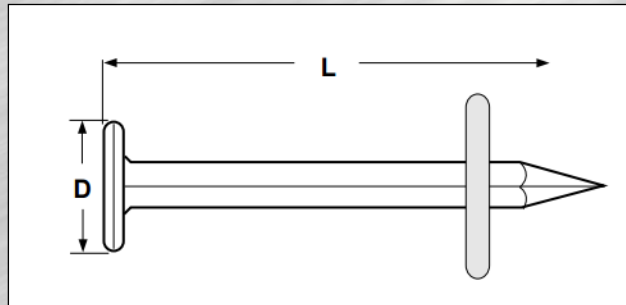

HxL Head Diameter x Overall Length	Pin Diameter	Minimum Embedment
1/4 x 1/2	1/7	3/8
1/4 x 3/4	1/7	5/8
1/4 x 1	1/7	5/8
1/4 x 1-1/4	1/7	5/8
1/4 x 1-1/2	1/7	5/8
1/4 x 2	1/7	5/8
1/4 x 2-1/2	1/7	5/8
1/4 x 3	1/7	5/8

DESCRIPTION: A nail-type fastener with a 3/8" diameter steel washer as an integral part of the nail, approximately 1/3 up the shank of the nail from the point.

APPLICATIONS/ADVANTAGES: Used to anchor metal, plastic, wood, particle board or fiber board in concrete, block or brick. It doesn't require a pre-drilled hole and can be set with a hammer when using a setting tool designed for drive pins.

MATERIAL: Heat treated alloy steel.

ANCHOR SPACING: Anchors should be installed a minimum of ten anchor diameters between each other and a minimum of five anchor diameters from the edge.