





545 Basket Road • Webster, NY 14580
Toll Free • 800.691.0292 | Local • 585.265.1990 | Fax • 585.265.6678
sales@fastenersdirect.com
www.fastenersdirect.com

HANGER BOLTS - PLAIN CENTER, 18-8 STAINLESS STEEL

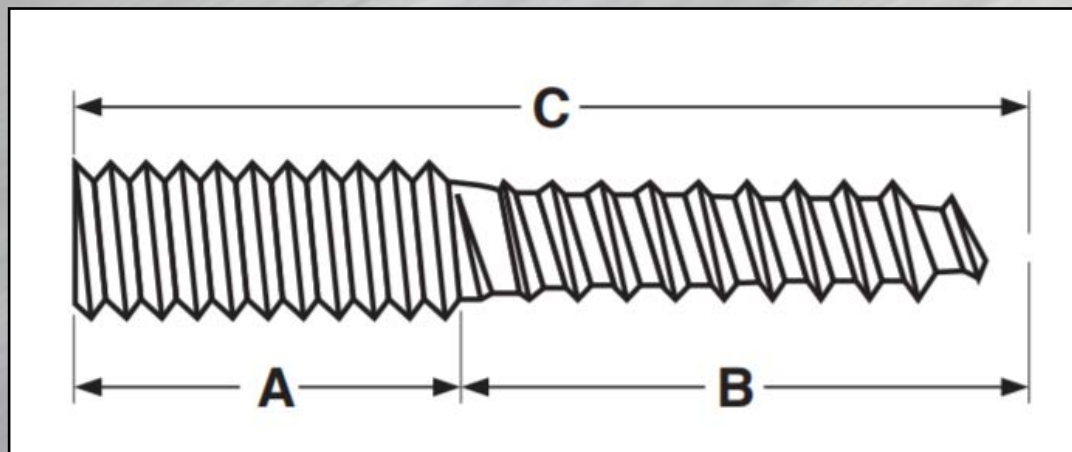

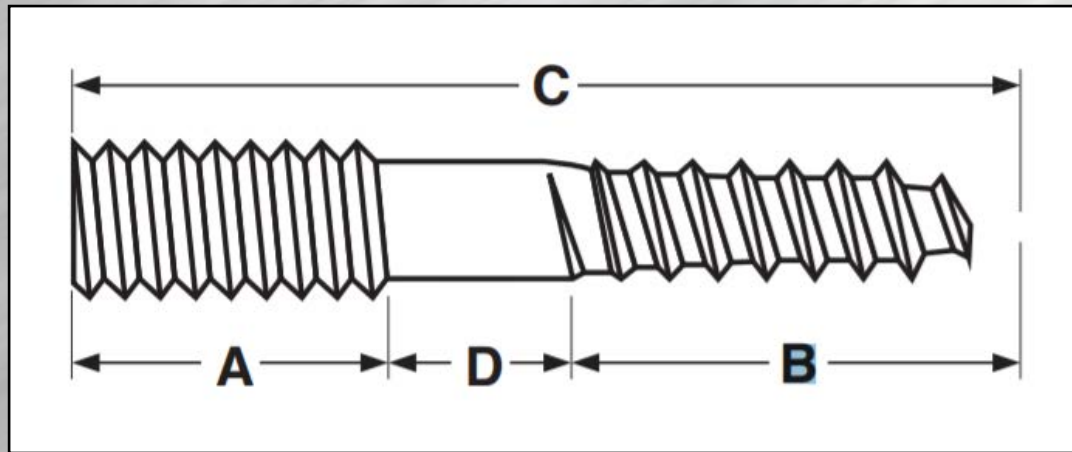

545 Basket Road • Webster, NY 14580
 Toll Free • 800.691.0292 | Local • 585.265.1990 | Fax • 585.265.6678
 sales@fastenersdirect.com
 www.fastenersdirect.com


HANGER BOLTS - PLAIN CENTER, 18-8 STAINLESS STEEL

Diameter & Thread Pitch	C		A		B		D								
	Standard Length	Machine Thread Length	Lag Thread Strength	Center Space	Standard Length	Machine Thread Length	Lag Thread Strength	Center Space							
6/32	5/8	1/4	3/8	-	1/4-20	2	1	1	-	3/8-16	1-1/2	1/2	1	-	
	3/4	3/8	3/8	-		2-1/4	1	1-1/4	-		2	1	1	-	
	7/8	1/4	5/8	-		2-1/2	1	1-1/2	-		2-1/2	1	1-1/2	-	
	1	3/8	5/8	-		2-3/4	1-1/4	1-1/2	-		3	1-1/2	1-1/2	-	
8-32	5/8	1/4	3/8	-		3	1-1/2	1-1/2	-		4-1/2	1-1/8	3	3/8	
	3/4	3/8	3/8	-		3-1/2	1-1/2	2	-		5	1-3/8	3	5/8	
	7/8	1/4	5/8	-		4	2	2	-		5-1/2	1-1/2	3	1	
	1	3/8	5/8	-		4-1/2	1-1/8	3	3/8		6	1-1/4	3	1-3/4	
	1-1/4	5/8	5/8	-		5	1-3/8	3	5/8		8	2-1/2	3	2-1/2	
	1-1/2	5/8	7/8	-		6	1-1/2	3	1-1/2		10	2-1/2	3	4-1/2	
	1-3/4	3/4	1	-		5/16-18	1-1/2	5/8	7/8		-	12	2-1/2	3	6-1/2
	2	1	1	-			1-3/4	3/4	1		-	14	2-1/2	3	8-1/2
10-24	1	3/8	5/8	-	2		1	1	-	1/2-13	3	1	2	-	
	1-1/4	5/8	5/8	-	2-1/4		1	1-1/4	-		3-1/2	1-1/2	2	-	
	1-1/2	5/8	7/8	-	2-1/2		1	1-1/2	-		4	2	2	-	
	1-3/4	3/4	1	-	2-3/4		1-1/4	1-1/2	-		5	2	3	-	
	2	1	1	-	3		1-1/2	1-1/2	-		6	2-1/2	3	1/2	
	2-1/2	1	1-1/2	-	3-1/2		1-1/2	2	-		8	2-1/2	3	2-1/2	
	3	1-1/2	1-1/2	-	3-3/4		1-3/4	2	-		10	2-1/2	3	4-1/2	
	3-1/2	1-1/2	2	-	4		2	2	-		12	2-1/2	3	6-1/2	
1/4-20	1	3/8	5/8	-	4-1/2		1-1/8	3	3/8		5/16-18	1-1/2	5/8	7/8	-
	1-1/4	5/8	5/8	-	5		1-3/8	3	5/8			1-3/4	1-3/4	2	-
	1-1/2	5/8	7/8	-	5-1/2	1-1/2	3	1	4			2	2	-	
	1-3/4	3/4	1	-	6	1-1/2	3	1-1/2	4-1/2			1-1/8	3	3/8	



545 Basket Road • Webster, NY 14580
 Toll Free • 800.691.0292 | Local • 585.265.1990 | Fax • 585.265.6678
 sales@fastenersdirect.com
 www.fastenersdirect.com

HANGER BOLTS - PLAIN CENTER, 18-8 STAINLESS STEEL

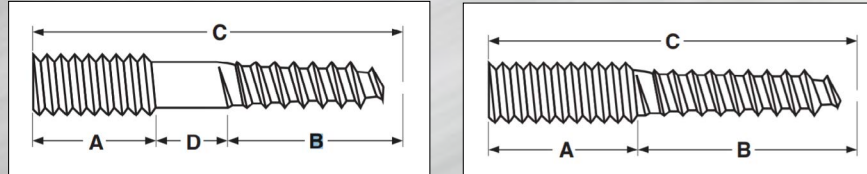

Tolerance on Length	Up to 6": +/- 1/16"	Over 6": +/- 1/8"
----------------------------	---------------------	-------------------

Description	Bolt with threaded areas at both ends — lag screw thread at one end and unified thread at the other. Standard hanger bolts are designed for insertion into a predrilled pilot hole. The end of the wood thread it designed as a taper which is threaded all the way to its blunt tip.
Applications / Advantages	Designed to hang material from wooden strutures. The lag is wrenched into the wood and the assembly is complete after applying a nut. Used for suspending electrical wiring and sheet metal. Also common in the furniture industry.
Material	Steel: AISI 1008 & 1010 Steel Stainless: Type 303 or 304 Stainless Steel
Core Hardness (Steel Only)	No. 10 through 1/2 in. diameter, all lengths: Rockwell B80 - B100
Tensile Strength (Steel Only)	No. 10 through 1/2 in. diameter, all lengths: 74,000 psi minimum (applies only to stresses applied to the Unified thread-side of the fastening)