





545 Basket Road • Webster, NY 14580  
Toll Free • 800.691.0292 | Local • 585.265.1990 | Fax • 585.265.6678  
[sales@fastenersdirect.com](mailto:sales@fastenersdirect.com)  
[www.fastenersdirect.com](http://www.fastenersdirect.com)

## HANGER BOLTS - PLAIN CENTER, STEEL ZINC

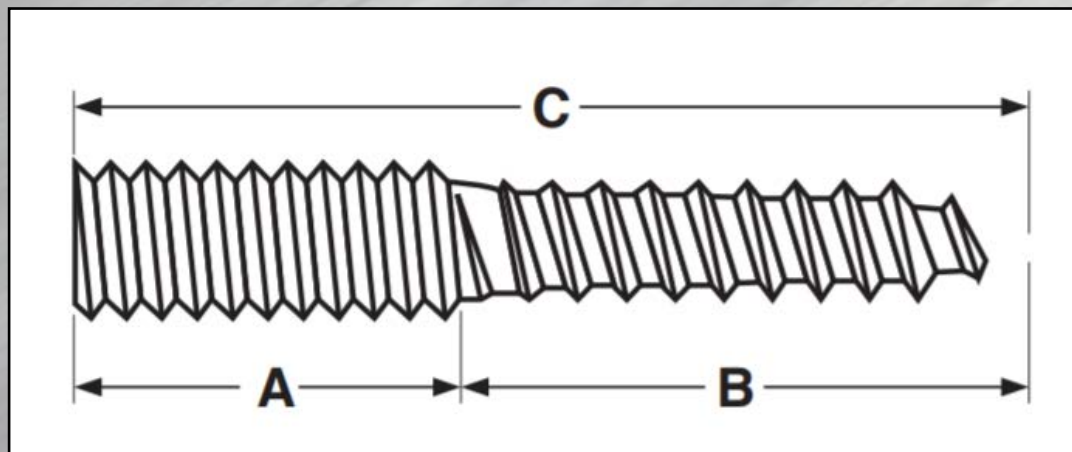

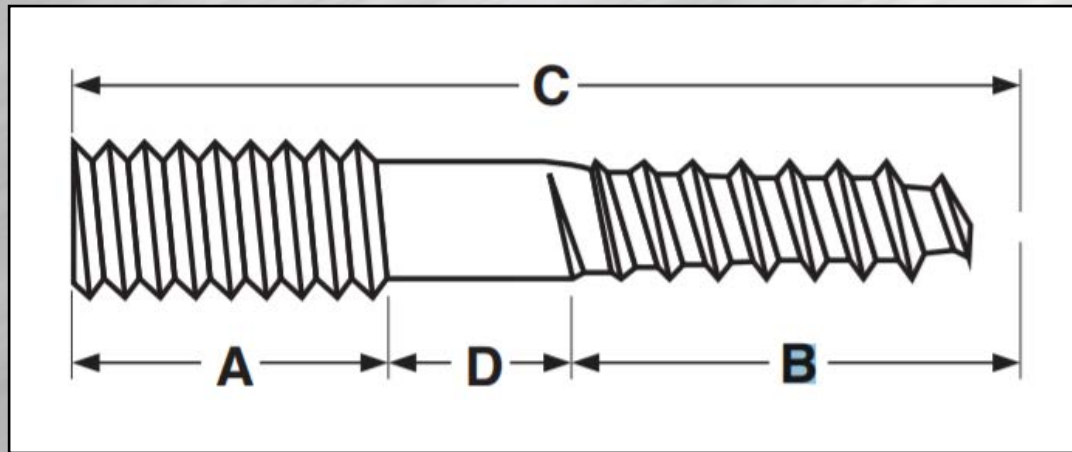

545 Basket Road • Webster, NY 14580  
 Toll Free • 800.691.0292 | Local • 585.265.1990 | Fax • 585.265.6678  
 sales@fastenersdirect.com  
 www.fastenersdirect.com


# HANGER BOLTS - PLAIN CENTER, STEEL ZINC

Diameter & Thread Pitch	C A B D				Diameter & Thread Pitch	C A B D				Diameter & Thread Pitch	C A B D			
	Standard Length	Machine Thread Length	Lag Thread Strength	Center Space		Standard Length	Machine Thread Length	Lag Thread Strength	Center Space		Standard Length	Machine Thread Length	Lag Thread Strength	Center Space
6/32	5/8	1/4	3/8	-	1/4-20	2	1	1	-	3/8-16	1-1/2	1/2	1	-
	3/4	3/8	3/8	-		2-1/4	1	1-1/4	-		2	1	1	-
	7/8	1/4	5/8	-		2-1/2	1	1-1/2	-		2-1/2	1	1-1/2	-
	1	3/8	5/8	-		2-3/4	1-1/4	1-1/2	-		3	1-1/2	1-1/2	-
8-32	5/8	1/4	3/8	-		3	1-1/2	1-1/2	-		3-1/2	1-1/2	2	-
	3/4	3/8	3/8	-		3-1/2	1-1/2	2	-		4	2	2	-
	7/8	1/4	5/8	-		4	2	2	-		4-1/2	1-1/8	3	3/8
	1	3/8	5/8	-		4-1/2	1-1/8	3	3/8		5	1-3/8	3	5/8
	1-1/4	5/8	5/8	-		5	1-3/8	3	5/8		5-1/2	1-1/2	3	1
	1-1/2	5/8	7/8	-		6	1-1/2	3	1-1/2		6	1-1/4	3	1-3/4
	1-3/4	3/4	1	-	5/16-18	1-1/2	5/8	7/8	-	8	2-1/2	3	2-1/2	
	2	1	1	-		1-3/4	3/4	1	-	10	2-1/2	3	4-1/2	
10-24	1	3/8	5/8	-		2	1	1	-	12	2-1/2	3	6-1/2	
	1-1/4	5/8	5/8	-		2-1/4	1	1-1/4	-	14	2-1/2	3	8-1/2	
	1-1/2	5/8	7/8	-		2-1/2	1	1-1/2	-	1/2-13	3	1	2	-
	1-3/4	3/4	1	-		2-3/4	1-1/4	1-1/2	-		3-1/2	1-1/2	2	-
	2	1	1	-		3	1-1/2	1-1/2	-		4	2	2	-
	2-1/2	1	1-1/2	-		3-1/2	1-1/2	2	-		5	2	3	-
	3	1-1/2	1-1/2	-		3-3/4	1-3/4	2	-		6	2-1/2	3	1/2
	3-1/2	1-1/2	2	-		4	2	2	-		8	2-1/2	3	2-1/2
1/4-20	1	3/8	5/8	-	4-1/2	1-1/8	3	3/8	10		2-1/2	3	4-1/2	
	1-1/4	5/8	5/8	-	5	1-3/8	3	5/8	12		2-1/2	3	6-1/2	
	1-1/2	5/8	7/8	-	5-1/2	1-1/2	3	1						
	1-3/4	3/4	1	-	6	1-1/2	3	1-1/2						



545 Basket Road • Webster, NY 14580  
 Toll Free • 800.691.0292 | Local • 585.265.1990 | Fax • 585.265.6678  
 sales@fastenersdirect.com  
 www.fastenersdirect.com

# HANGER BOLTS - PLAIN CENTER, STEEL ZINC

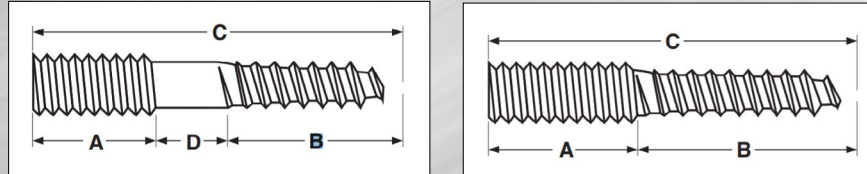

<b>Tolerance on Length</b>	Up to 6": +/- 1/16"	Over 6": +/- 1/8"
----------------------------	---------------------	-------------------

<b>Description</b>	Bolt with threaded areas at both ends — lag screw thread at one end and unified thread at the other. Standard hanger bolts are designed for insertion into a predrilled pilot hole. The end of the wood thread it designed as a taper which is threaded all the way to its blunt tip.
<b>Applications / Advantages</b>	Designed to hang material from wooden strutures. The lag is wrenched into the wood and the assembly is complete after applying a nut. Used for suspending electrical wiring and sheet metal. Also common in the furniture industry.
<b>Material</b>	<b>Steel:</b> AISI 1008 & 1010 Steel <b>Stainless:</b> Type 303 or 304 Stainless Steel
<b>Core Hardness (Steel Only)</b>	<b>No. 10 through 1/2 in. diameter, all lengths:</b> Rockwell B80 - B100
<b>Tensile Strength (Steel Only)</b>	<b>No. 10 through 1/2 in. diameter, all lengths:</b> 74,000 psi minimum (applies only to stresses applied to the Unified thread-side of the fastening)